

Description

The TruAudio BP-SUB-12 was designed to be used in most any room you want deep sounding bass in a very discreet way. The BP-SUB-12 can be used in a TV home theater application or throughout the home to add great sounding bass to your distributed audio system.

In the Box

- Subwoofer
- 30" sound tube with 2 tube clamps
- In wall/ceiling baffle
- Cut out template
- Paintable Grill
- Mounting straps (2)
- Mounting brackets (2)


NOTE: The BP-SUB-12 Is a passive subwoofer which must be paired with the TruAudio TRU-S500DSP subwoofer amplifier.

The BP-SUB-12 is a custom product which can be mounted many ways as per your application. Here are two ways we recommend, but all applications are different and need to be taken into account.

Install Method 1 - Straps

Attach the two mounting straps between two rafters and place the subwoofer on the straps. Ensure that the subwoofer is not touching the ceiling sheet rock. Next fit the tube with the baffle attached through the hole in the sheetrock from below and attach the tube to the subwoofer port. Be sure to tighten the custom tube clamp over the tube on both ends. Now attach the baffle to the ceiling.

NOTE: dry fit the baffle and tube from the subwoofer box to the ceiling where you will cut the hole to make sure it fits.

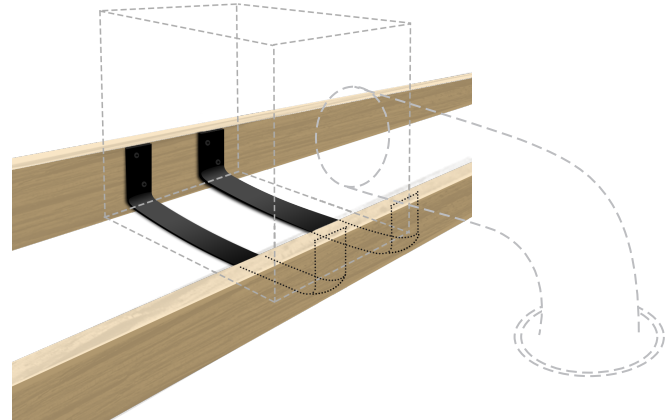


Install Method 2 - Wall Mount

Attach the short wall bracket to the subwoofer box using 1" wood screws (Put a drop of silicone around the screw to prevent a possible air leak. If you put any holes in the subwoofer box in the wrong location by accident you must fill the hole(s) with silicone).


Attach the longer bracket to a stud using 2" wood screws. Attach the subwoofer to the stud mount and make sure it is secure. Next fit the tube with the baffle attached through the sheetrock from below and attach the tube to the subwoofer port. Be sure to tighten the custom tube clamp over the tube on both ends. Now attach the baffle to the ceiling.

NOTE: dry fit the baffle and tube from the subwoofer box to the ceiling where you will cut the hole to make sure it fits.

ATTACH TO SUBWOOFER

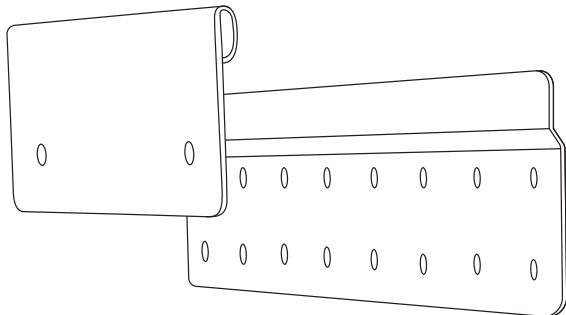

ATTACH TO STUD

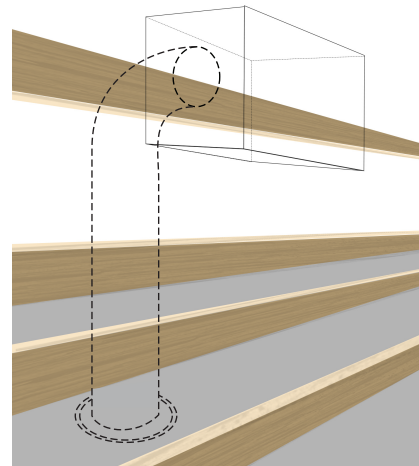

BP-SUB-12

Speaker Type:	Bandpass subwoofer
Woofers:	12" Aluminum
Power:	350 watts
Impedance:	4 Ω
Freq Response:	35 - 120 Hz
Sensitivity:	88 dB
Grill Type:	Ghost style, frameless
Cabinet Dims:	17" (432mm) H, 17" (432mm) W, 11" (279mm) D

Family:



UNIVERSAL

It is the policy of TRUAUDIO to continuously incorporate improvements into our products. All specifications are subject to change without notice. If you have any questions regarding this or any other TRUAUDIO products, please visit www.TruAudio.com or contact us:

Office: 1-888-858-1555, Monday-Friday 7 am - 6 pm MST.
Fax: 435-251-9815
Email: CustomerService@truaudio.com

TruAudio
198 N Old Highway 91
Hurricane, UT 84737 USA