
D16 AMPLIFIER APPLICATIONS

USING WRAITH INVISIBLE SERIES

8888

ST BR

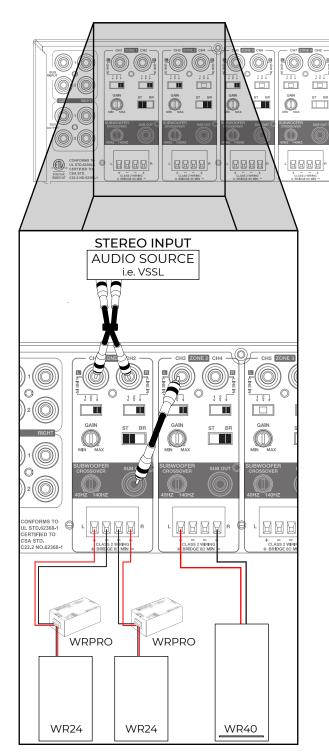

SETUP:

10000

Õ

ST BR

1. Attach your source to the left and right RCA input and set the switch to "ST" (stereo).

Õ

19999

ST BR

TRUAUDIO

FC (E & A IN CHIN

D16

- 2. Set the left and right channel to "LINE IN" on the speaker zone.
- 3. Attach the left and right Wraith WR24 speakers using the WRPRO to connect to the phoenix connector.
- 4. Run a single RCA wire from the speaker zone "SUB OUT" to the subwoofer zone (typically, the adjacent zone) left channel input and set to "LINE IN".
- 5. Set the subwoofer zone to "BR" (bridge).
- 6. Attach the Wraith WR40 subwoofer speaker wires to the subwoofer zone's phoenix connector's outermost connectors.

ADJUSTING THE SOUND:

- Use the GAIN knob on the speaker zone to adjust the speaker level.
- Use the GAIN knob on the subwoofer zone to adjust the subwoofer level
- Use the source volume control to adjust the overall volume
- Use the subwoofer crossover knob on the speaker zone to adjust the signal coming from the "SUB OUT" RCA to the subwoofer zone.

When using multiple speakers and subwoofers, you can send your source into the BUS Inputs.

