


The OP Series outdoor speakers have undergone an innovative redesign. TruAudio has developed a new hassle-free installation, as well as advanced improvements to audio performance in the attempt to create the perfect speaker for outdoor audio. The bass enhancing passive radiator adds a clear low end frequency, truly rounding out the speakers performance. TruAudio's new Quick Lock™ technology allows for a seamless installation while keeping the speaker flush to the installation surface. Outdoor audio has met it's match with the reimagined OP series by TruAudio.



SIMPLIFY THE INSTALL PROCESS


The OP Series speaker incorporates newly created Quick Lock™ technology to streamline the installation process. The TruAudio Quick Lock™ design is a three-step process to ensure the correct angle of the speaker, while maintaining a simple installation process.

Installing the Speaker

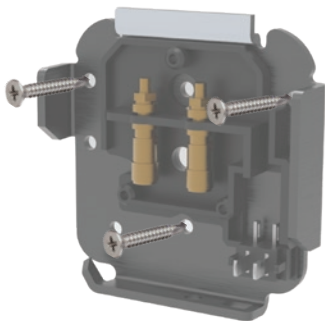

1. MOUNT THE WALL PLATE

Use screws to attach the wall plate to the desired location.

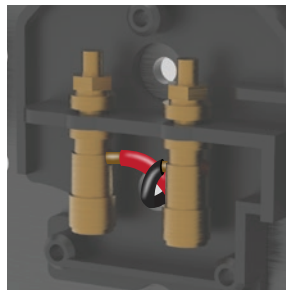

2. TERMINATE WIRES

Terminate the wires to the binding posts. Connect the Red (+) to the red terminal and the Black (-) to the black terminal.




3. ATTACH THE SPEAKER TO THE WALL PLATE

Attach the speaker by using the top lip on the wall plate and drop the speaker into place.




3. ADJUST THE SPEAKER ANGLE

Adjust the angle of the face of the speaker to the desired position.

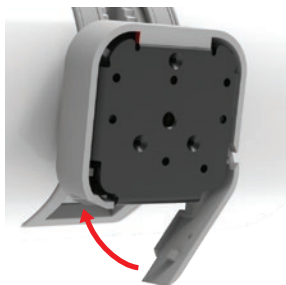

4. CLOSE THE LOCKING LEVER


When the speaker is angled to the listening area, close the locking lever. The Quick Lock™ lever locks the speaker into place and terminates the speaker.

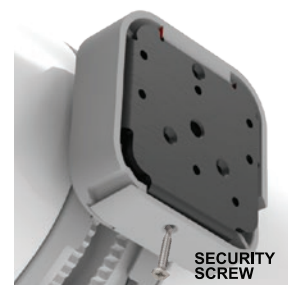

5. INSTALL SECURITY SCREW

Install the security screw to keep the Quick Lock™ lever closed. To remove the speaker the lever needs to be opened fully.



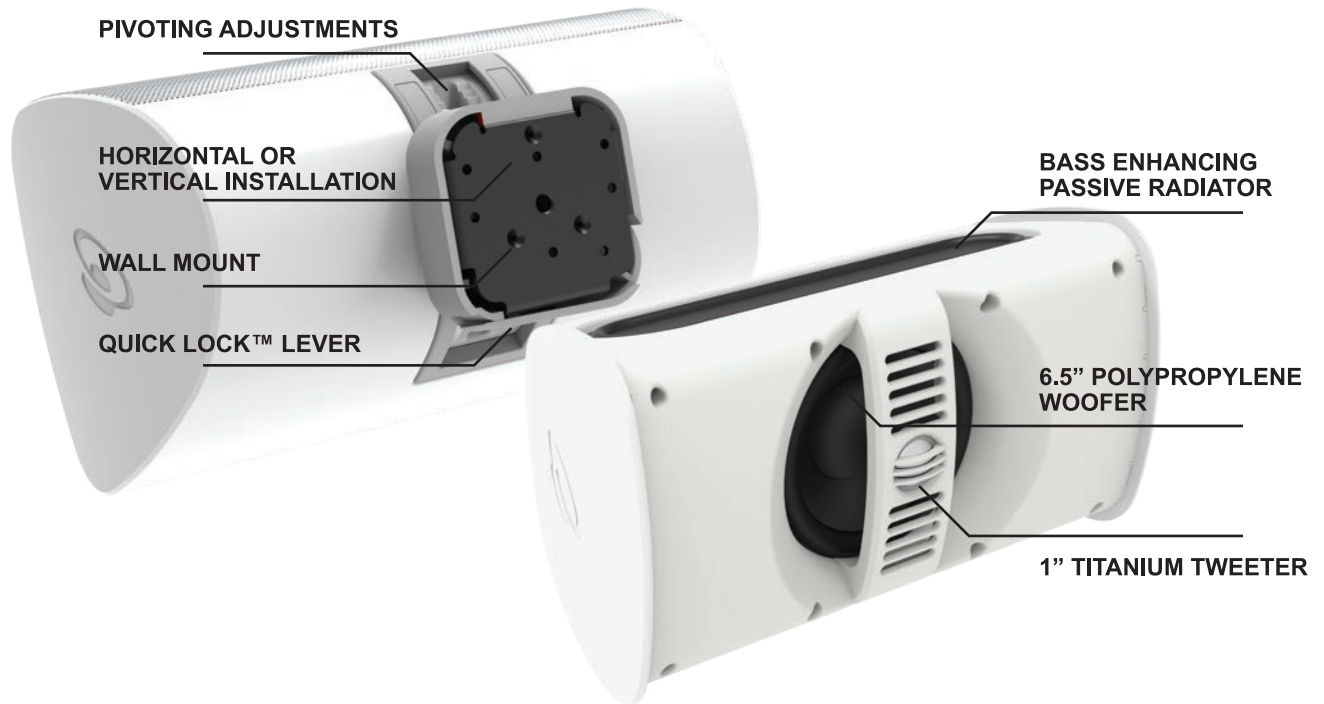

OP6-WT | OP6-BK

Speaker Type	Outdoor, 2-way
Woofer:	6.5" polypropylene
Passive Radiator:	Bass enhancing radiator
Tweeter:	1" titanium
Power:	25-150W
Impedance:	8Ω
Frequency Response:	65-20kHz
Sensitivity:	89dB
Grill Type:	Aluminum microperf
Speaker Wire Connector:	Quick Lock™ technology
Finish Dimensions:	W:14.5" (368mm)
	H: 8.3" (211mm)
	D: 8.9" (226mm)

